

MARA - Vanity unit 1 drawer - 600/800/1000





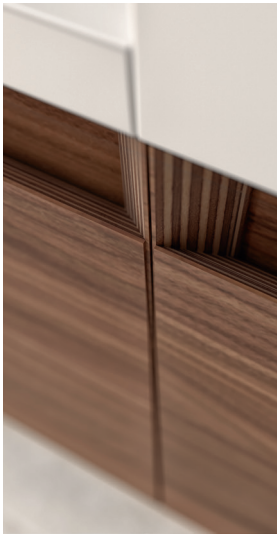

Exterior finishes

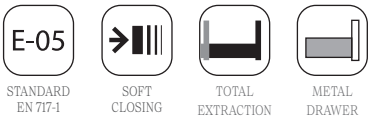

Interior finishes



Onix

Technical information

_Front Panels (e=16 mm):
Manufactured with 15 mm multilayer birch board + natural wood veneers, (total thickness of the board 16 mm) coated with acrylic varnish in a natural textured finish.

_Internal Structure Panels (e=16mm): Laminated particle board onix finish.

_Recessed type handle
Mechanized fronts and sides with 45° molding.

*All panels used in the manufacture of this unit are classed as E-1 grade with low level of formaldehyde content.
*Trim varies according to design: PVC, ABS (edged with PUR glue)

Fittings

_Handle: Heavy duty hanger with three independent adjustments accessible from the front. Load capacity of 70Kg.

_Drawers: Grass V8 metallic drawer onix finish. Highend hidden runners with total extraction, soft close and Side and height adjustment. Maximum load capacity: 30 kgs.

Compatible Washbasins

_Wash basins available
- 600/800/1000/1200: Constanza, Veneto, Vilna, Toscana.


_Top basins with counter top
Altiro, Kandy, Lokum, Varmega, Tento, Bol, Bulkan, Bica, Talea, Carla, Dune, Loop, Cozy, Venice


_Semi inset basins with counter top
Mael

Packaging dimensions and weight


	600	800	1000
Lenght (mm)	660	860	1060
Depth (mm)		510	
Height (mm)		470	
Net weight (kg)	16,2	21,7	24,5
Gross weight (kg)	18,3	24,3	26,3

Dimensions

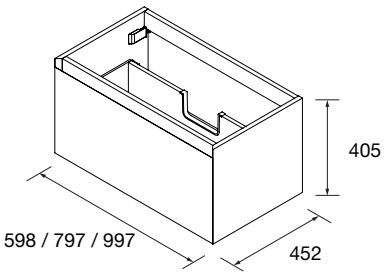




Back free space for water conections

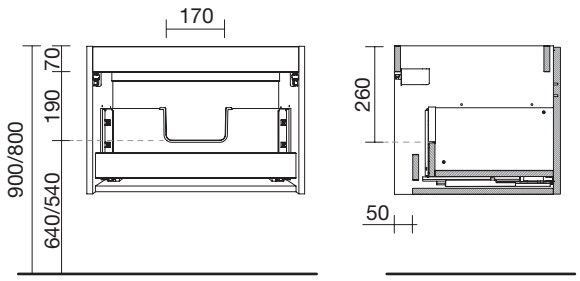

MARA - Wall-hung unit 2 drawers - 600/800/1000



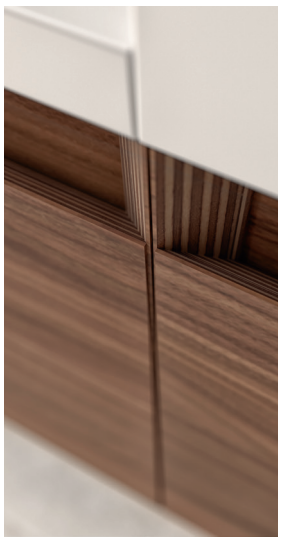

E-05 STANDARD EN 717-1 | SOFT CLOSING | TOTAL EXTRACTION | METAL DRAWER | SPACER INCLUDED

Exterior finishes



Interior finishes



Onix

Technical information

_Front Panels (e=16 mm):
Manufactured with 15 mm multilayer birch board + natural wood veneers, (total thickness of the board 16 mm) coated with acrylic varnish in a natural textured finish.

_Internal Structure Panels (e=16mm): Laminated particle board onix finish.


_Recessed type handle
Mechanized fronts and sides with 45° molding.

*All panels used in the manufacture of this unit are classed as E-1 grade with low level of formaldehyde content.
*Trim varies according to design: PVC, ABS (edged with PUR glue)


Packaging dimensions and weight

	600	800	100
Lenght (mm)	660	860	1060
Depth (mm)		510	
Height (mm)		610	
Net weight (kg)	23	27,6	32,4
Gross weight (kg)	25,5	30,5	32,1

Dimensions




Open drawer



Fittings

_Handle: Heavy duty hanger with three independent adjustments accessible from the front. Load capacity of 70Kg.

_Drawers: Grass V8 metallic drawer onix finish. Highend hidden runners with total extraction, soft close and Side and height adjustment. Maximum load capacity: 30 kgs.

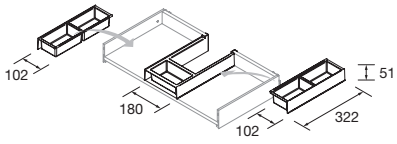

Drawer organizer included.


Compatible Washbasins

_Wash basins available
- 600/800/1000/1200: Constanza, Veneto, Vilna, Toscana.

_Top basins with counter top
Altiro, Kandy, Lokum, Varmega, Tento, Bol, Bulkan, Bica, Talea, Carla, Dune, Loop, Cozy, Venice

_Semi inset basins with counter top
Mael

Back free space for water conections



MARA - Tall unit 1600



E-05
STANDARD EN 717-1

110
HINGE OPENING 110º

REVERSIBLE

Exterior finishes



Interior finishes



Onix

Technical information

_Front Panels (e=16 mm):
Manufactured with 15 mm multilayer birch board + natural wood veneers, (total thickness of the board 16 mm) coated with acrylic varnish in a natural textured finish.

_Internal Structure Panels (e=16mm): Laminated particle board onix finish.

_Recessed type handle
Mechanized fronts and sides with 45° molding.


_Glass shelves (thickness 5mm)
Adjustable in height. 4 units.

*All panels used in the manufacture of this unit are classed as E-1 grade with low level of formaldehyde content.
*Trim varies according to design: PVC, ABS (edged with PUR glue)

Packaging dimensions and weight

	350 x 1600
Lenght (mm)	415
Depth (mm)	415
Height (mm)	1680
Net weight (kg)	17,2
Gross weight (kg)	19,3

Dimensions

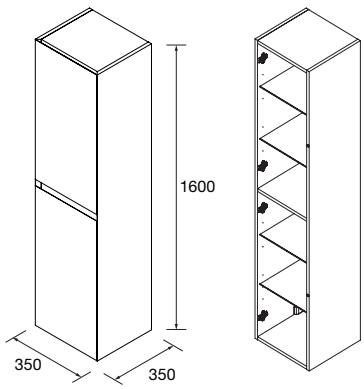

Fittings

_Hangers: high resistance wall brackets with three independent regulations. Load capacity 70Kg.

_Hinges: Hettich hinges with adjustment. Opening 110°.