BOREAL - LED Light



IP44 IP44

Low consumption. Led Samsung.

Standard CE

5 3 years guarantee

Technical information

V0 polycarbonate body and chrome-plated V0 ABS arm.

- Packaging components:
1 fixture
1 multi-mount
1 connection box
UTE rubber


- Mounting system:
Integrated tab for anchoring to glass/mirror


Packaging dimensions and weight

	308	500	700
Lenght (mm)	315	515	715
Depth (mm)	75		
Height (mm)	45		
Net weight (kg)	0,131	0,201	0,213
Gross weight (kg)	0,192	0,261	0,273

	308	500	700
Kelvin	5700		
Insulation class	CII		
Watios	6 W	8 W	10 W
Nominal voltage	230 V		
Energy efficiency	E		
Useful life	36.000 h		
Lúmenes	738	985	1217

Dimensions

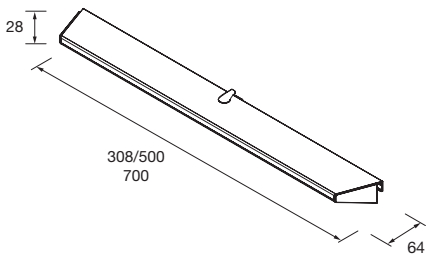



	308	500	700
1	1150 lx	1373 lx	1500 lx
2	474 lx	564 lx	599 lx
3	165 lx	240 lx	205 lx